
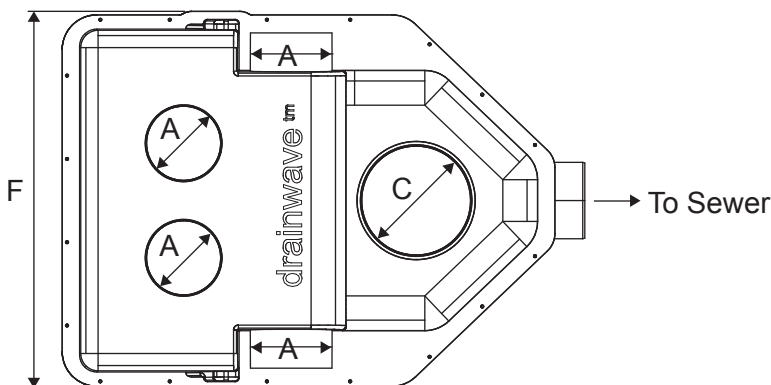


# DRAINWAVE<sup>®</sup>

## PLUMBING TECHNOLOGY

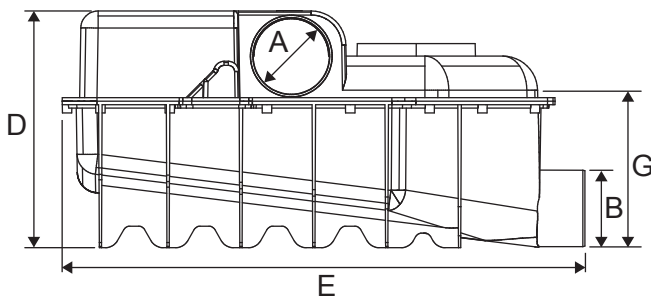

**Description :**

PVC in line sewer doing unit.  
 Drain line flush augmentation device to compliment Ultra Low Dual Flush (3/2 L) toilets and other water efficient plumbing fixtures.

**Model No:** 9L

**Colour:** Grey

**Connection:** 100mm Diameter PVC pipes

**Weight:** 18.7 Kgs

**Warranty:** 15 years, refer to website [www.drainwave.com](http://www.drainwave.com)



Licence No.:  
 WMKA22107


All measurements in mm

A	B	C	D	E	F	G
Inlet (Inner diameter)	Outlet (Outer diameter)	Inspection Port (Inner diameter)	Total Unit Height	Total Unit Length	Total Unit Width	Invert Inlet to Outlet
110	110	160	340	760	670	210


# INSTALLATION

## Schematic Layout

A single Drainwave and serve up to 6 WCs.

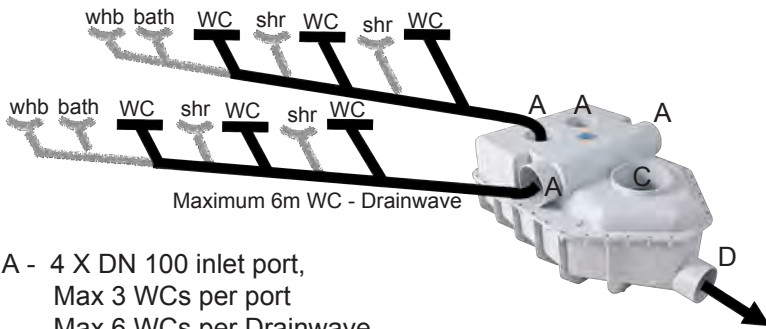

- A - 4 X DN 100 inlet port,
- Max 3 WCs per port
- Max 6 WCs per Drainwave
- Maximum 6m horizontal distance between Drainwave and furthestmost WC

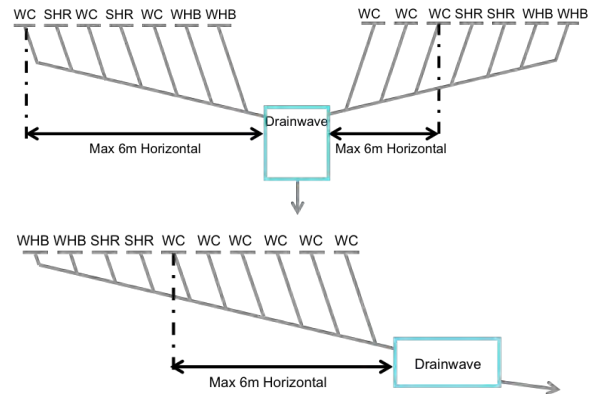


### Legend

- WC - Water closet
- whb - Wash hand basin
- shr - shower

## Trench Installation

Standard pipe bedding and backfill

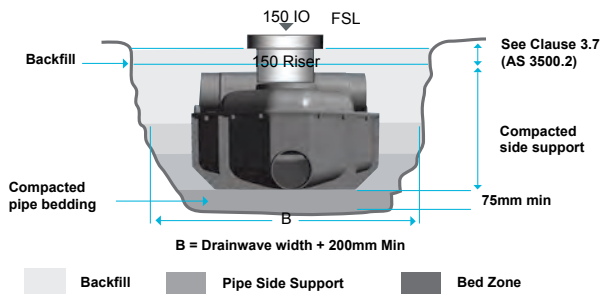

## Suspended Installation

Standard pipe suspension systems



\* Refer Drainwave Installation Instructions for detailed installation instructions  
[www.drainwave.com](http://www.drainwave.com)